

1.	Revision History.....	2
2.	Contents.....	3
3.	General Description.....	4
4.	Absolute Maximum Ratings.....	5
5.	Electrical Specification.....	6
6.	Optical Specification.....	8
7.	Viewing Modes.....	8
8.	Outline Dimension.....	11
9.	Block Diagram.....	13
10.	INTERFACE	13
11.	Command/AC Timing.....	15
12.	Handling Precautions.....	18

3. General Description

3.1 Description

FORMIKE KWH101FL06-F01 is a TFT active matrix electrophoretic display, color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT-LCD module, a driver circuit and a back-light unit. Graphics and texts can be displayed on 1024 (W) x 3 x600 (H) dots with LVDS data signal. The following table described the features of FORMIKE KWH101FL06-F01

3.2 Application

Portable DVD

GPS

Notebook

3.3 Advantage

High Resolution: WSVGA 1024(RGB) x 600 Dots

3.3V LVDS (Low Voltage Differential Signaling) interface with 1 pixel/clock

adopting a high aperture ratio

Dot-Inversion

3.4 Features

Feature	Description
Size	10.1 inches (16:9 Diagonal)
Driver element	a-Si TFT active matrix
Display mode	Normally White, transmissive
Display Resolution	1024x 600 (H x V)
Active area	222.72 x 125.28 mm
Dot pitch	0.2175 (W) x 0.2088(H)
Outline Dimension (W x H x D)	235 x 143 x 5.15mm
Luminance	200cd/m ² (Typ.)
constrast ratio	500
Surface treatment	Anti-Glare,
Color Arrangement	RGB stripe
interface	LVDS
View Direction	12 o'clock
Module weight	TBD

NOTE: about Viewing Direction, the best viewing direction is 12 o'clock, and the optimum contrast direction is at 6 o'clock.

4. ABSOLUTE MAXIMUM RATINGS


Item	Symbol	Condition	Min.	Max.	Unit	Remark
Power Voltage	VDD,	GND=0	-0.3	4	V	
Power Voltage	V _{in}	GND=0	-0.3	VDD+0.3	V	NOTE
Logic Output Voltage	V _{OUT}	GND=0	-0.3	VDD+0.3	V	NOTE
Storage Temperature(Ambient)		TSTG	-20	+60	°C	
Operation Temperature(Ambient)		TOPR	0	+50	°C	

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp. _ 60, 90% RH MAX_ .

Temp. _ 60_, Absolute humidity shall be less than 90% RH at 60_

2.

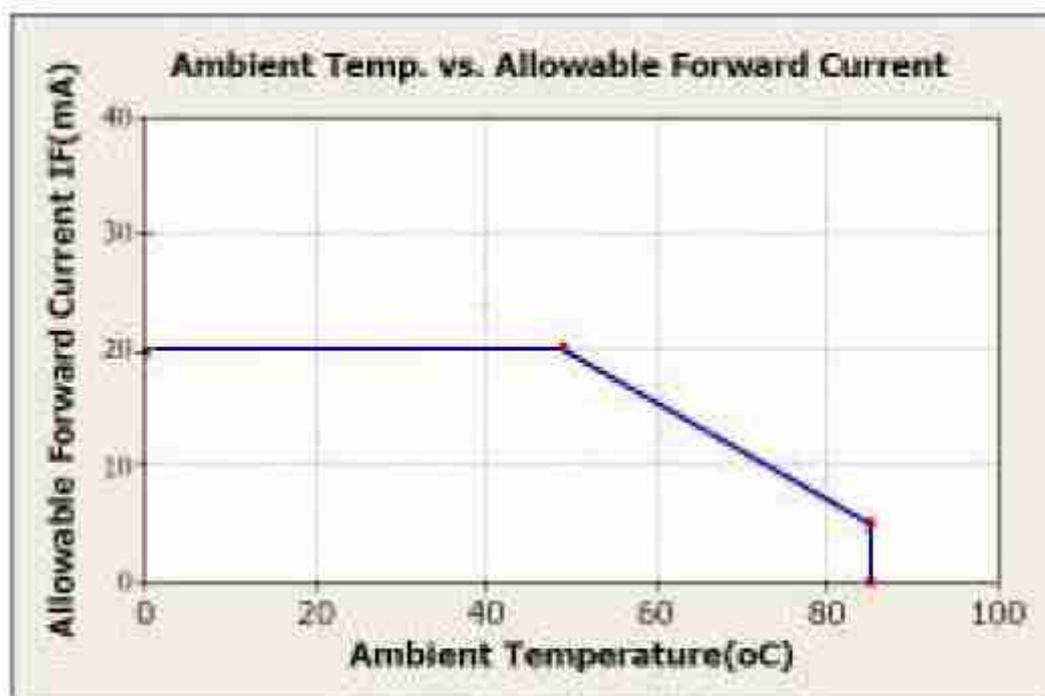

5. ELECTRICAL SPECIFICATIONS(Ta=25°C)


5.1. Operating conditions:

Ta = 25 ± 2 °C

Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Power Supply Voltage	DVDD	3	3.3	3.6	V	
LVDS Differential Input High Threshold	V _{TH(LVDS)}	-	-	+100	mV	Note2
LVDS Differential Input Low Threshold	V _{TL(LVDS)}	-100	-	-	mV	Note 2
LVDS Common Mode Voltage	V _{CM}	1.125	-	1.375	V	Note 2
LVDS Differential Input Voltage	V _{ID}	100	-	600	mV	Note 2
Terminating Resistor	R _T	-	100	-	Ohm	

Note 1: The ambient temperature is Ta = 25 ± 2 °C.

Note 2: The parameters of LVDS signals are defined as the following figures.

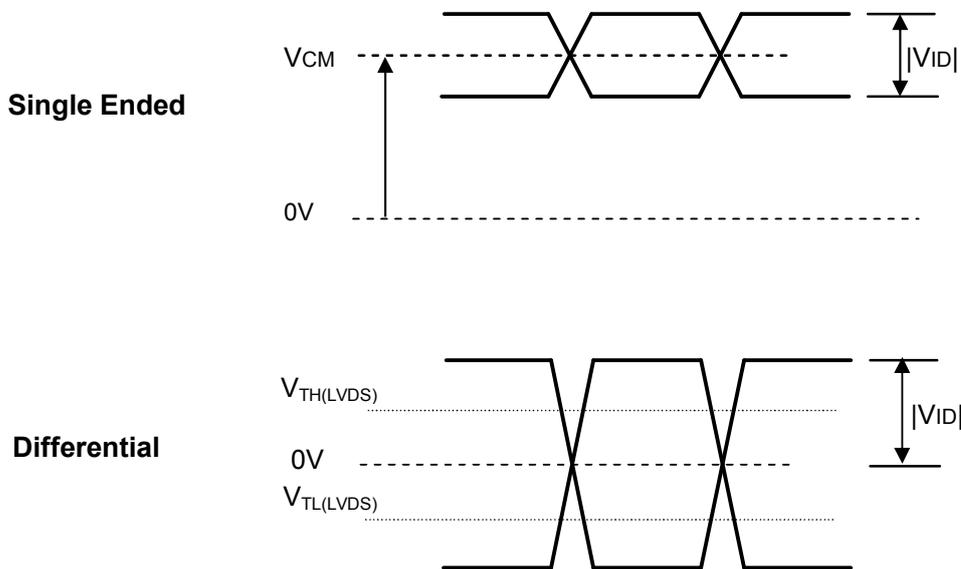


5.2. Backlight Driving Section

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
LED Voltage	LED-VDD	4.8	5	5.5	V	Note 1
LED Current	IL	-	180	-	mA	
Power Consumption	PLED	-			mW	
Life Time	-	-	(25,000)	-	hr	Note2;3

Note 1: There are 1 Groups LED

Note 2: The ambient temperature is Ta = 25 ± 2 °C.

Note 3: Brightness to be decreased to 50% of the initial value

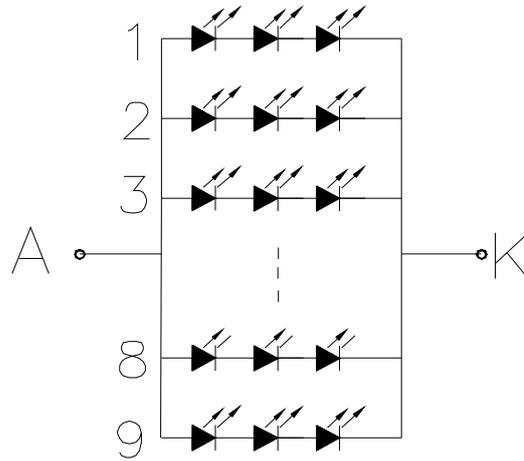


BLU CIRCUIT DIAGRAM

5.3.RECOMMENDED OPERATING RATINGS

Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
EN Control Level	Backlight on		1.8	-	5	V	
	Backlight off		0	-	0.8	V	
PWM Control Level	PWM High Level		1.3	-	5	V	
	PWM Low Level		0	-	0.15	V	
PWM Control Duty Ratio			20		100	%	
PWM Control Permissive Ripple Voltage		V_{PWM_pp}			100	mV	
PWM Control Frequency		f_{PWM}	200	400	500	Hz	

5.4 LED BACKLIGHT CONTROL ON/OFF SEQUENCE

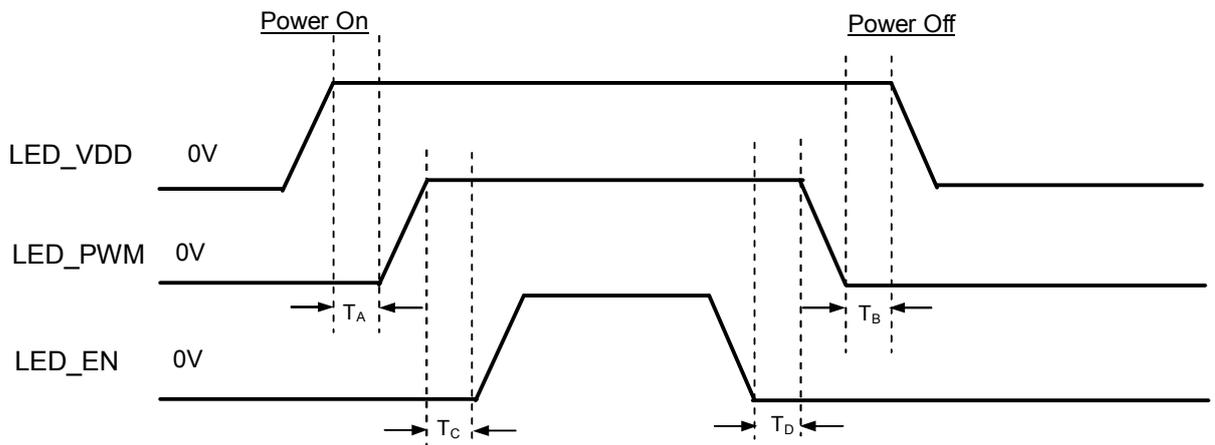

Timing Specifications:

- $T_A \cong 0ms$
- $T_B \cong 0ms$
- $T_C \cong 10ms$
- $T_D \cong 0ms$

Note (1) Please follow the LED backlight power sequence as above. If the cust could not follow, it might cause backlight flash issue during dis ON/OFF or damage the LED backlight controller

6. OPTICAL SPECIFICATIONS(Ta=25°C)

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Contrast Ratio	C/R	150	500	-		Fig.1
Brightness		-	200	-	cd/m2	Full White Pattern
Brightness Uniformity		-	80%	-	%	Full White Pattern Fig.1,2
Response Time	Tr+Tf	-	8	-	ms	Fig.3
Color Coordinate	WHITE	Wx	0.28	0.31	0.35	IBL=20mA Full White Pattern
		Wy	0.29	0.34	0.38	
view angle	θ_l	-	60	-	Degree	Fig.4 Center (C/R>10)
	θ_r	-	60	-		
	θ_u	-	50	-		
	θ_d	-	55	-		
Transmittance Ratio	TR	6.2	6.6	6.68	%	LCD With POL

Note:

1. Contrast Ratio(CR) is defined mathematically as :

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$


2. Surface luminance is the center point across the LCD surface 500mm from the surface with all pixels displaying white. For more information see FIG 1.

3. Response time is the time required for the display to transition from black to white (Rise Time, Tr) and from white to black(Decay Time, Tf). For additional information see FIG 3.

4. Viewing angle is the angle at which the contrast ratio is greater than 5. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

5. Optimum contrast is obtained by adjusting the LCD Threshold voltage (Vth& Vsat)

7. Viewing Modes

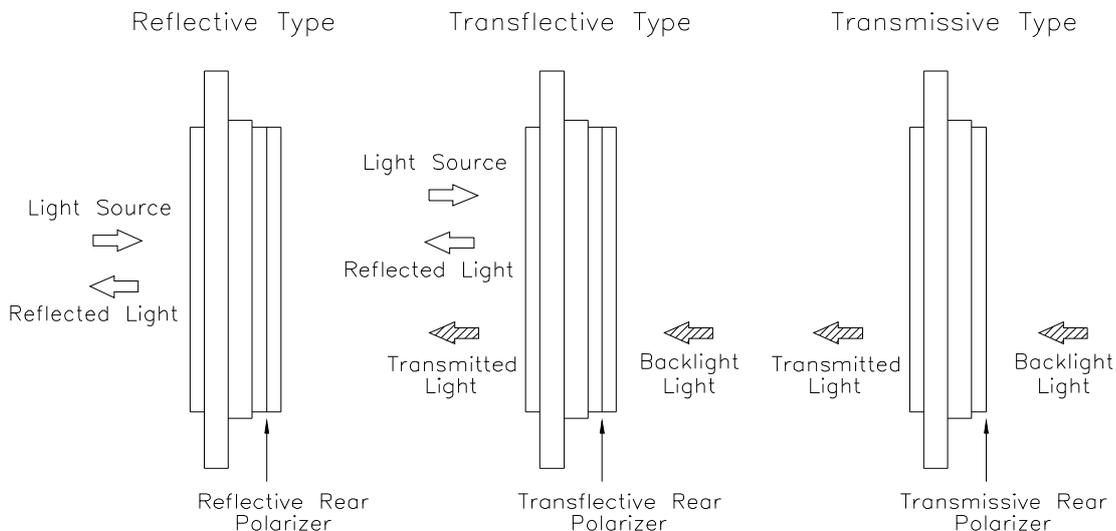


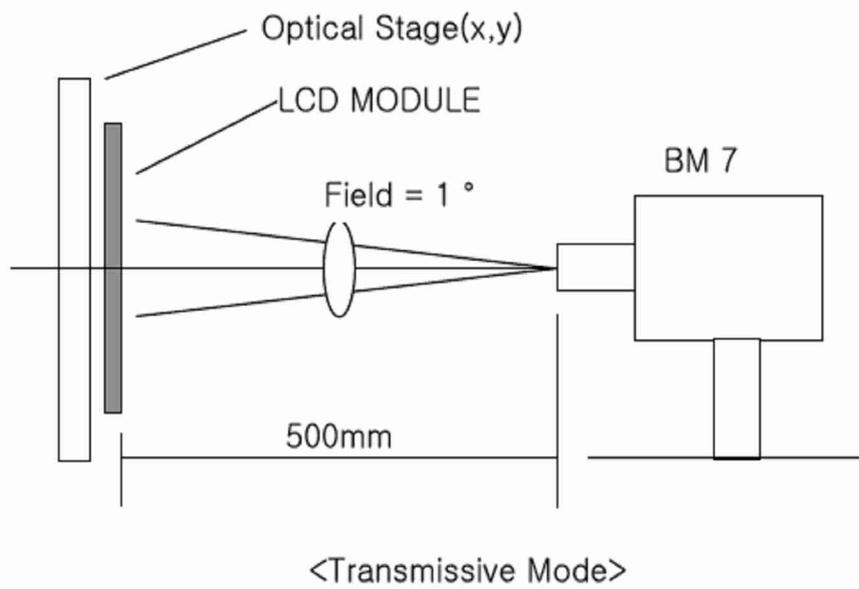


FIG. 1 Optical Characteristic Measurement Equipment and Method

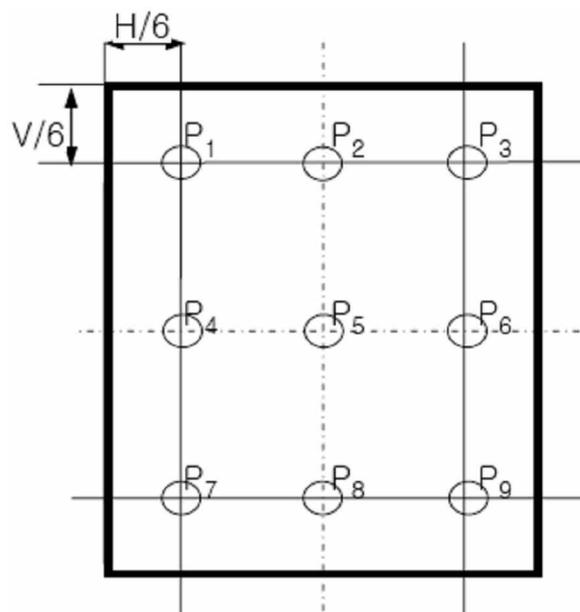

P1-P9: Main Measuring point

Fig. 2 Measuring Points

The response time is defined as the following figure and shall be measured by switching the input signal for “black” and “white”.

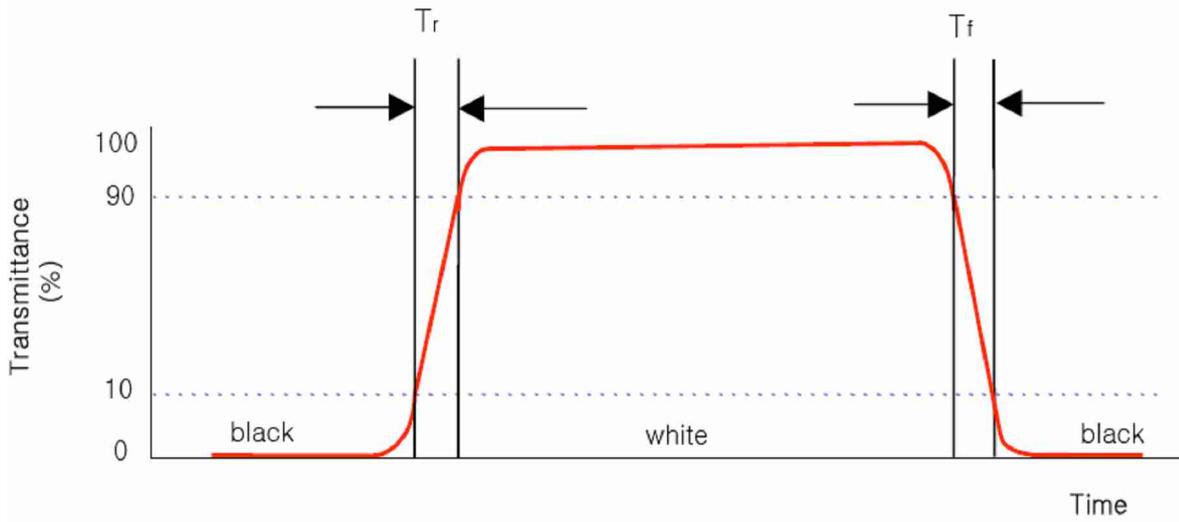


FIG.3 The definition of Response Time

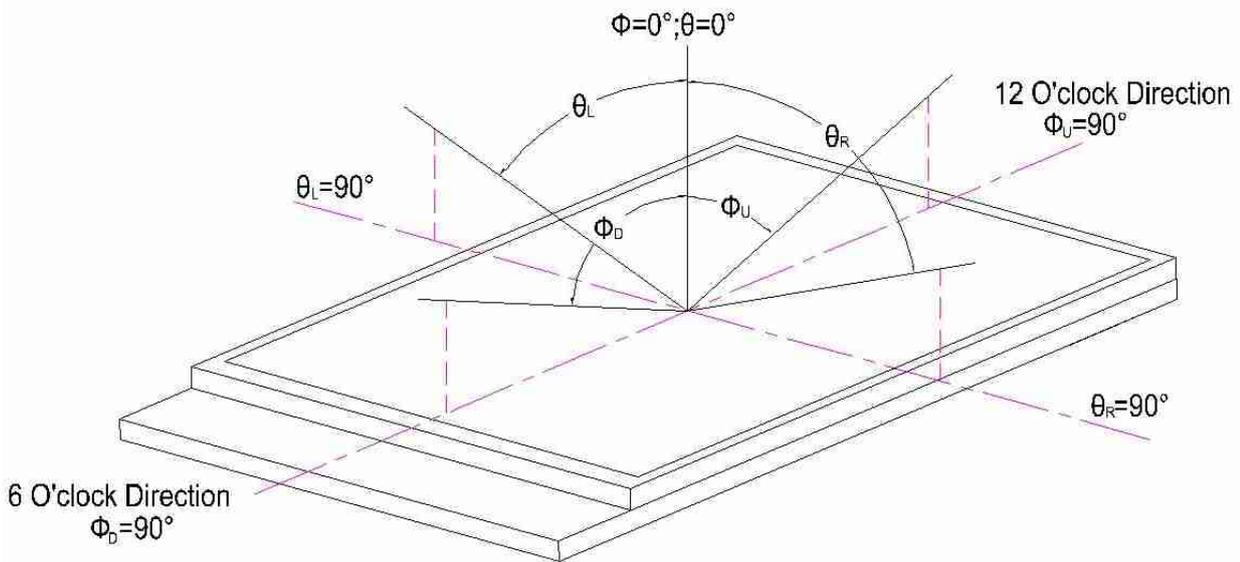


FIG.4 The definition of Viewing Angle

Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the

8. Mechanical drawing

For Customer:

Approval Date:

Approved by:

产品符合ROHS标准.

8. 电路图

1. 说明:
 2. Δ 表示更改标记;尺寸上有□的为必检尺寸
 3. 单位:mm 未注公差为L/±0.3 H±0.3
 测试规则遵守右图所示

4. 使用BIP-7亮度色度仪测量。测量高度是500mm, 角度为1度。
5. 所有未注圆角尺寸为R0.3
6. 所有的零部件表面必须为绝缘材料(如FPC, LED)
7. 工作温度:-30° C--70° C保存温度:-40° C--80° C;

9. 电光特性


项目 Item	符号 Symbol	最小值 min	典型值 TP	最大值 max	单位 Unit	测试条件 Condition
正向电压 Forward Voltage	V _F	8.3	9.1	10.2	V	(I _F =40 mA V _F =5.0V)
反向电流 Reverse Current	I _V				μA	
背光 lumin	亮度 Luminance	70	75		cd/m ²	
色坐标	色坐标 Colour Coordinate	X	200	230	cd/m ²	
		Y	0.280	0.325		
			0.280	0.325		

NO.	Material Title	QTY
10	BEZEL 镀锌锌 Ti: 0.3	1
10	Shading tape 3G-BW650S	1
9	Reflector film RW188	1
8	Diffuser film CH-30	1
7	Thin BEF (upper) GP-155	1
6	Thin BEF (lower) GP-155	1
5	Diffuser film T:0.12	1
4	SMT LED (white) 2400	27
3	FPC PI	1
2	Light guide PMMA	1
1	Plastic housing URZ2501	1

DRAWING No.: KWH101FL06-CD	REV	A0
SHEET 1 of 1	FIRST ANGLE PROJECTION	
CHECKED:	UNIT mm	
DESIGN:		
APPROVED:		

REV	DATE	DESCRIPTION	DESIGNED	CHECK	APPROVED
1					

9. Block diagram

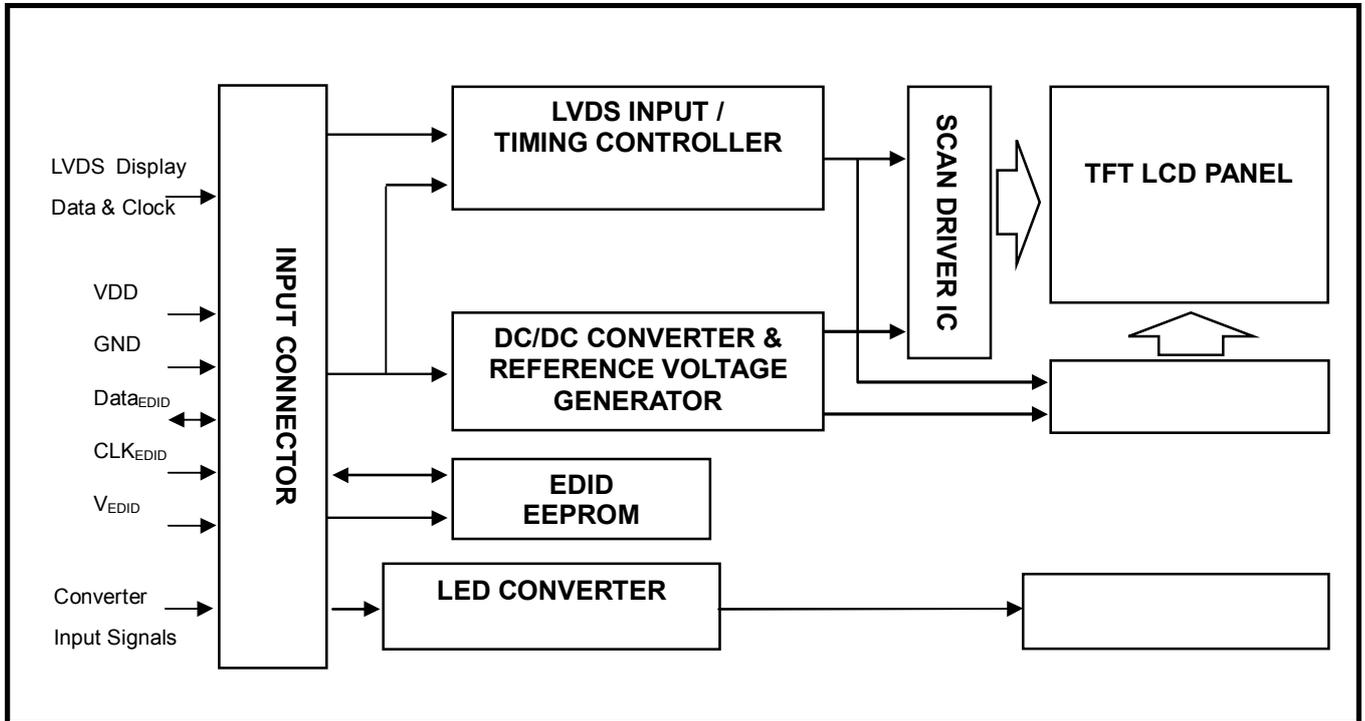

10. Interface

10.1 LCM PIN Definition

Pin No.	Symbol	Description	Remark
1	NC	No Connection (Reserve)	
2	VDD	Power Supply (3.3V typ.)	
3	VDD	Power Supply (3.3V typ.)	
4	VEDID	DDC 3.3V power	
5	NC	No Connection (Reserve for CMO test)	BIST
6	CLKEDID	DDC clock	
7	DATAEDID	DDC data	
8	Rxin0-	LVDS differential data input	R0-R5, G0
9	Rxin0+	LVDS differential data input	

10	GND	Ground	
11	Rxin1-	LVDS differential data input	G1~G5, B0, B1
12	Rxin1+	LVDS differential data input	
13	GND	Ground	
14	Rxin2-	LVDS Differential Data Input	B2-B5, HS, VS , DE
15	Rxin2+	LVDS Differential Data Input	
16	GND	Ground	
17	RxCLK-	LVDS differential clock input	
18	RxCLK+	LVDS differential clock input	
19	GND	Ground	
20	NC	No Connection (Reserve)	
21	NC	No Connection (Reserve)	
22	GND	Ground	
23	NC	No Connection (Reserve)	
24	NC	No Connection (Reserve)	
25	GND	Ground	
26	NC	No Connection (Reserve)	
27	NC	No Connection (Reserve)	
28	GND	Ground	
29	NC	No Connection (Reserve)	
30	NC	No Connection (Reserve)	
31	LED_GND	LED Ground	
32	LED_GND	LED Ground	
33	LED_GND	LED Ground	
34	NC	Non connection	
35	LED_PWM	PWM Control Signal of LED Converter	
36	LED_EN	Enable Control Signal of LED Converter	
37	NC	Non connection	
38	LED_VDD	LED Power	
39	LED_VDD	LED Power	
40	LED_VDD	LED Power	

Note


Note1: Connector Part No.: IPEX-20455-040E-12 or equivalent

Note2: User's connector Part No: IPEX-20453-040T-01 or equivalent


11. Command/AC Timing

11.1 AC Electrical CHARACTERISTICS


Parameter	Symbol	Condition	Spec			Unit
			Min.	Typ.	Max.	
Clock period	t_{CLK}	VDDD=2.3V to 2.7V	5.4	-	-	ns
		VDDD=2.7V to 3.6V	4 ⁽¹⁾	-	-	ns
Clock low pulse width	$t_{CLK(L)}$	VDDD=2.3V to 2.7V	2.2	-	-	ns
		VDDD=2.7V to 3.6V	1.6	-	-	ns
Clock high pulse width	$t_{CLK(H)}$	VDDD=2.3V to 2.7V	2.2	-	-	ns
		VDDD=2.7V to 3.6V	1.6	-	-	ns
Data setup time	t_{SETUP1}	VDDD=2.3V to 2.7V	1.1	-	-	ns
		VDDD=2.7V to 3.6V	0.7	-	-	ns
Data hold time	t_{HOLD1}	VDDD=2.3V to 2.7V	1.1	-	-	ns
		VDDD=2.7V to 3.6V	0.7	-	-	ns
CLK,LV[5:0] rising time	t_{RISE}	VDDD=2.3V to 2.7V	-	-	0.5	ns
		VDDD=2.7V to 3.6V	-	-	0.4	ns
CLK,LV[5:0] falling time	t_{FALL}	VDDD=2.3V to 2.7V	-	-	0.5	ns
		VDDD=2.7V to 3.6V	-	-	0.4	ns
Start pulse setup time	t_{SETUP2}	VDDD=2.3V to 2.7V	1	-	-	ns
		VDDD=2.7V to 3.6V	1	-	-	ns
Start pulse delay time	t_{PLH1}	VDDD=2.3V to 2.7V Loading=15pF	-	-	13	ns
		VDDD=2.7V to 3.6V Loading=15pF	-	-	13	ns
	t_{PHL1}	VDDD=2.3V to 2.7V Loading=15pF	-	-	13	ns
		VDDD=2.7V to 3.6V Loading=15pF	-	-	13	ns
Reset(RST) high period	t_{RESETH}	-	50ns over 3 CLK	-	-	
LD high period	$t_{LD(H)}$	-	200	-	-	ns
POL to LD setup time	t_{POL-LD}	POL toggle to LD rising	-5	-	-	ns
LD to POL hold time	t_{LD-POL}	LD falling to POL toggle	6	-	-	ns
Receiver off to LD timing	$t_{REC-OFF}$	-	5	-	-	CLK
LD to reset input time	$t_{LD-RESET}$	-	200	-	-	ns
Reset low to LD rising time	$t_{RESET-LD}$	-	0	-	-	ns

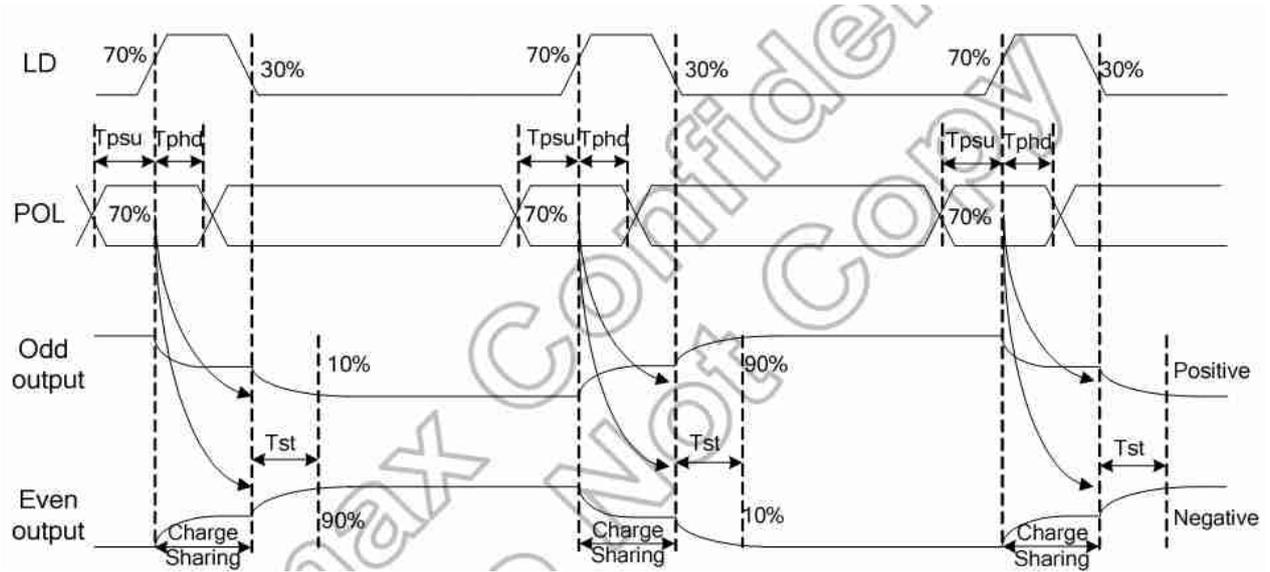

11.4 Timing diagram 3

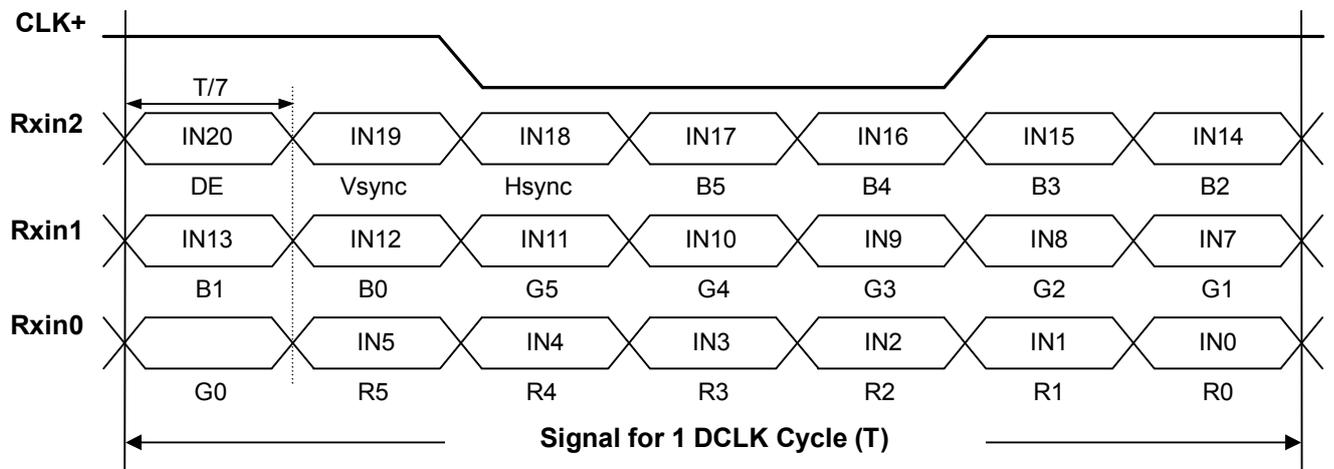

11.4 Timing diagram 4

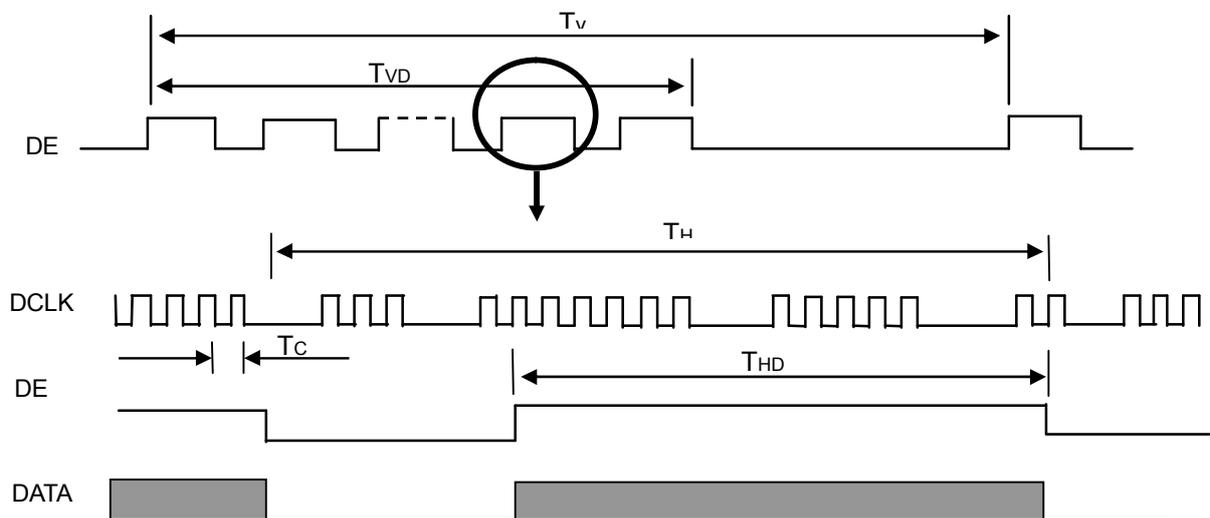

12.PRECAUTIONS FOR USE

12.1.Safety

- (1) Do not swallow any liquid crystal, even if there is no proof that liquid crystal is poisonous.
- (2) If the LCD panel breaks, be careful not to get liquid crystal to touch your skin.
- (3) If skin is exposed to liquid crystal, wash the area thoroughly with alcohol or soap.

12.2.Storage Conditions

- (1) Store the panel or module in a dark place where the temperature is $23\pm 5^{\circ}\text{C}$ and the humidity is below $50\pm 20\% \text{RH}$.
- (2) Store in anti-static electricity container.
- (3) Store in clean environment, free from dust, active gas, and solvent.
- (4) Do not place the module near organics solvents or corrosive gases.
- (5) Do not crush, shake, or jolt the module.
- (6) Do not exposed to direct sun light of fluorescent lamps.

12.3.Installing LCD Module

Attend to the following items when installing the LCM.

- (1) Cover the surface with a transparent protective plate or touch panel to protect the polarizer and LC cell.
- (2) When assembling the LCM into other equipment, the spacer to the bit between the LCM and the fitting plate should have enough height to avoid causing stress to the module surface, refer to the individual specifications for measurements. The measurement tolerance should be $\pm 0.1 \text{mm}$.

12.4.Precautions For Operation

- (1) Viewing angle varies with the change of liquid crystal driving voltage (V_0). Adjust V_0 to show the best contrast.
- (2) Driving the LCD in the voltage above the limit will shorten its lifetime.
- (3) Response time is greatly delayed at temperature below the operating temperature range. However, this does not mean the LCD will be out of the order. It will recover when it returns to the specified temperature range.
- (4) When turning the power on, input each signal after the positive/negative voltage becomes stable.
- (5) Do not apply water or any liquid on product which composed of T/P.

12.5.Handling Precautions

- (1) Avoid static electricity which can damage the CMOS LSI; please wear the wrist strap when handling.
- (2) The polarizing plate of the display is very fragile. so, please handle it very carefully.
- (3) Do not give external shock.
- (4) Do not apply excessive force on the surface; it may cause display abnormal .
- (5) Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- (6) Do not use ketonics solvent & Aromatic solvent, use with a soft cloth soaked with a cleaning naphtha solvent.
- (7) Do not operate it above the absolute maximum rating.
- (8) Do not remove the panel or frame from the module.
- (9) Do not apply water or any liquid on product, which composed of T/P.

12.6.Warranty

- (1) The period is within 12 months since the date of shipping out under normal using and storage conditions.
- (2) The warranty will be avoided in case of defect induced by customer.